


SPE-10000, SPE-20000

Stand-alone tailstock.

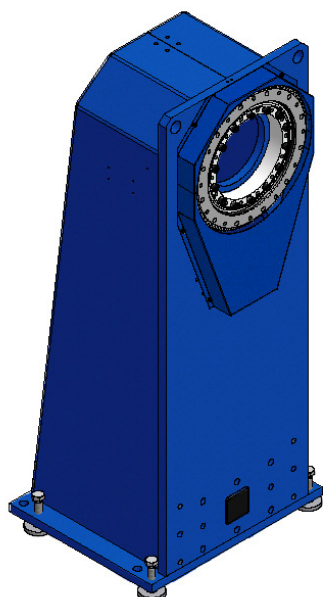


- Simple, modular design
- Prepared for media transfer units.

This is a one station tailstock for workpieces requiring rotation about one axis. It is a stand alone tailstock suitable for integration in e.g. compact welding stations.

Options

- Slip ring device
- Controlled air
- Fixture disc
- Fixture bracket

Technical data		SPE-10000	SPE-20000
Max. payload		10 tons	20 tons
Maximum fixture width, radius = R		970, 1200, 1500 mm	1830 mm
Welding capacity, option	100% duty cycle 60% duty cycle	350 A 460 A	2x 350 A 2x 460 A

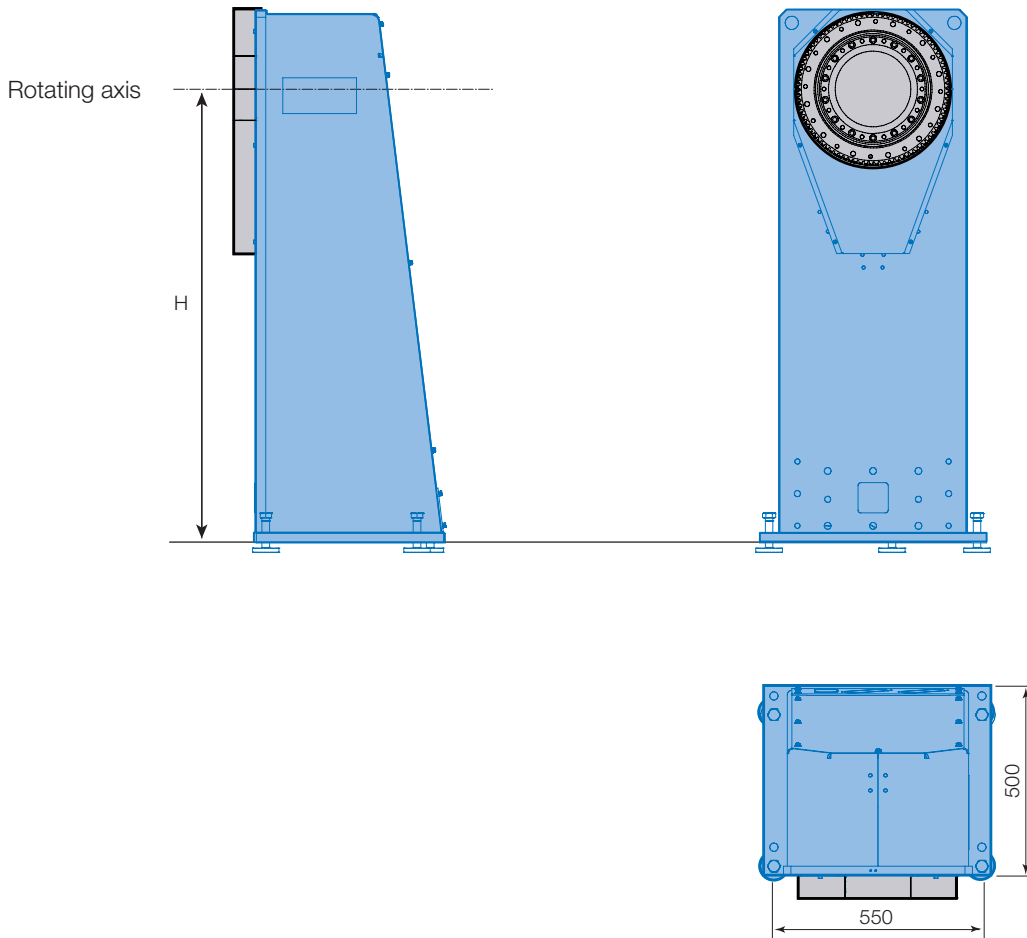

	H (mm)	Weight	Part No.
SPE-10000	970	290 kg	115405-100
	1200	321 kg	115405-101
	1500	362 kg	115405-102
SPE-20000	1830	1512 kg	115378-101